



STREAM

Stream turns office lighting upside down. The first ceiling light which doesn't require mounting, as soon as Stream is out of the box, it's ready to shine. In the most effective and beautiful way. Its high-quality light comes via indirect light which has been beamed upwards. It then rolls out over an environment with the capacity to illuminate multiple desks. The lighting can also be personalised using the Tunable White technology. There is not a work-space which Stream could not enhance with the unique atmosphere which it creates.

FEATURES

- Highest possible visual comfort thanks to 100 % indirect lighting
- Guaranteed glare-free: Stream Office meets all standards for office lighting
- Efficient and standard-compliant illumination of up to four workstations
- Can be positioned as required, stood on a table/desk or supplied with a stand
- Hinge to enable perfect alignment can be tilted from -25° to $+25^{\circ}$
- Equipment box features a magnetic housing and can be attached to the stand, the table leg or in cable bracket on the desk

TECHNICAL DATA

System power	46 W – 143 W
Luminous flux of luminaire	6000 lm – 16'500 lm
Colour temperature	2700 K, 3000 K, 4000 K, 2700 K – 6500 K
Colour Rendering Index [CRI]	Ra \geq 80
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP20
Photobiological safety	Risk group 1, low risk

SPECIFICATIONS


- Versions: Table (height 350 mm), Low (1100 mm), High (1800 mm)
- Luminous flux of luminaire: 6'000 lm – 16'500 lm
- Control gear integrated into equipment box
- With pushbutton on the housing for switching and dimming
- Accessories: Operating module for the workplace for switching, dimming, presence detection and daylight control
- Accessories: External daylight and presence sensor for MyLights Remote and Tunable White versions, acoustic panel for improved reflection and acoustics

APPLICATION AREAS

- Office & Education:** offices, open-plan offices, conference rooms, conference rooms, reception areas
- Retail & Hospitality:** counters, galleries, hotels, restaurants, living spaces



IP20 230V

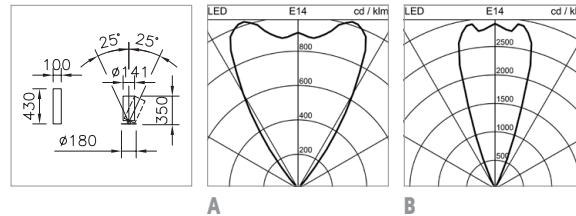

UPLIGHT STREAM


TABLE

System power	Luminous flux of luminaire	Colour temperature	Colour	Light control	Ref. n° Plug: CH	Ref. n° Plug: EU
46 W	6000 lm	2700 K	white	MyLights Remote A	2003.7779	2003.7780
46 W	6000 lm	2700 K	white	dimnable digital A	2003.7777	2003.7778
46 W	6000 lm	2700 K	white	MyLights Remote B	2003.7767	2003.7768
46 W	6000 lm	2700 K	white	dimnable digital B	2003.7765	2003.7766
46 W	6000 lm	2700 K	black	MyLights Remote A	2003.7763	2003.7792
46 W	6000 lm	2700 K	black	dimnable digital A	2003.7762	2003.7791
46 W	6000 lm	2700 K	black	MyLights Remote B	2003.7783	2003.7784
46 W	6000 lm	2700 K	black	dimnable digital B	2003.7781	2003.7782
80 W	7300 lm	2700–6500 K	white	MyLights Remote A	2004.6782	2004.6783
80 W	7300 lm	2700–6500 K	white	MyLights Remote B	2004.6776	2004.6777
80 W	7300 lm	2700–6500 K	black	MyLights Remote A	2004.6775	2004.6789
80 W	7300 lm	2700–6500 K	black	MyLights Remote B	2004.6784	2004.6785
120 W	14'500 lm	4000 K	white	MyLights Remote A	2003.4686	2003.4688
120 W	14'500 lm	4000 K	white	dimnable digital A	2003.4252	2003.4253
120 W	14'500 lm	4000 K	white	MyLights Remote B	2003.4637	2003.4638
120 W	14'500 lm	4000 K	white	dimnable digital B	2001.8360	2001.8361
120 W	14'500 lm	4000 K	black	MyLights Remote A	2003.4689	2003.4690
120 W	14'500 lm	4000 K	black	dimnable digital A	2003.4254	2003.4255
120 W	14'500 lm	4000 K	black	MyLights Remote B	2003.4639	2003.4640
120 W	14'500 lm	4000 K	black	dimnable digital B	2001.8362	2001.8363
120 W	14'000 lm	3000 K	white	MyLights Remote A	2003.4682	2003.4683
120 W	14'000 lm	3000 K	white	dimnable digital A	2003.4248	2003.4249
120 W	14'000 lm	3000 K	white	MyLights Remote B	2003.4633	2003.4634
120 W	14'000 lm	3000 K	white	dimnable digital B	2001.8356	2001.8357
120 W	14'000 lm	3000 K	black	MyLights Remote A	2003.4684	2003.4685
120 W	14'000 lm	3000 K	black	dimnable digital A	2003.4250	2003.4251
120 W	14'000 lm	3000 K	black	MyLights Remote B	2003.4635	2003.4636
120 W	14'000 lm	3000 K	black	dimnable digital B	2001.8358	2001.8359
143 W	16'500 lm	4000 K	white	MyLights Remote A	2003.4695	2003.4696
143 W	16'500 lm	4000 K	white	dimnable digital A	2003.4260	2003.4261
143 W	16'500 lm	4000 K	white	MyLights Remote B	2003.4645	2003.4646
143 W	16'500 lm	4000 K	white	dimnable digital B	2001.8368	2001.8369
143 W	16'500 lm	4000 K	black	MyLights Remote A	2003.4697	2003.4698
143 W	16'500 lm	4000 K	black	dimnable digital A	2003.4262	2003.4263
143 W	16'500 lm	4000 K	black	MyLights Remote B	2003.4647	2003.4648
143 W	16'500 lm	4000 K	black	dimnable digital B	2001.8370	2001.8371
143 W	16'000 lm	3000 K	white	MyLights Remote A	2003.4691	2003.4692
143 W	16'000 lm	3000 K	white	dimnable digital A	2003.4256	2003.4257
143 W	16'000 lm	3000 K	white	MyLights Remote B	2003.4641	2003.4642
143 W	16'000 lm	3000 K	white	dimnable digital B	2001.8364	2001.8365

UPLIGHT STREAM

TABLE


System power	Luminous flux of luminaire	Colour temperature	Colour	Light control	Ref. n° Plug: CH	Ref. n° Plug: EU
143 W	16'000 lm	3000 K	black	MyLights Remote A	2003.4693	2003.4694
143 W	16'000 lm	3000 K	black	dimnable digital A	2003.4258	2003.4259
143 W	16'000 lm	3000 K	black	MyLights Remote B	2003.4643	2003.4644
143 W	16'000 lm	3000 K	black	dimnable digital B	2001.8366	2001.8367

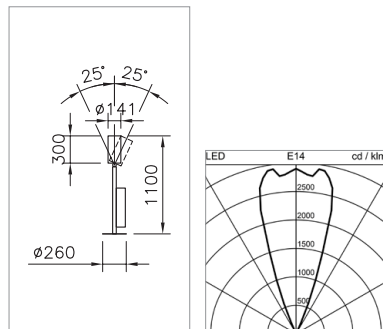

UPLIGHT STREAM

LOW

System power	Luminous flux of luminaire	Colour temperature	Colour	Light control	Ref. n° Plug: CH	Ref. n° Plug: EU
46 W	6000 lm	2700 K	white	MyLights Remote	2003.7771	2003.7772
46 W	6000 lm	2700 K	white	dimnable digital	2003.7769	2003.7770
46 W	6000 lm	2700 K	black	MyLights Remote	2003.7787	2003.7788
46 W	6000 lm	2700 K	black	dimnable digital	2003.7796	2003.7786
80 W	7300 lm	2700-6500 K	white	MyLights Remote	2004.6778	2004.6779
80 W	7300 lm	2700-6500 K	black	MyLights Remote	2004.6786	2004.6787
120 W	14'500 lm	4000 K	white	MyLights Remote	2003.4653	2003.4654
120 W	14'500 lm	4000 K	white	dimnable digital	2001.8376	2001.8377
120 W	14'500 lm	4000 K	black	MyLights Remote	2003.4655	2003.4656
120 W	14'500 lm	4000 K	black	dimnable digital	2001.8378	2001.8379
120 W	14'000 lm	3000 K	white	MyLights Remote	2003.4649	2003.4650
120 W	14'000 lm	3000 K	white	dimnable digital	2001.8372	2001.8373
120 W	14'000 lm	3000 K	black	MyLights Remote	2003.4651	2003.4652
120 W	14'000 lm	3000 K	black	dimnable digital	2001.8374	2001.8375
143 W	16'500 lm	4000 K	white	MyLights Remote	2003.4661	2003.4662
143 W	16'500 lm	4000 K	white	dimnable digital	2001.8384	2001.8385
143 W	16'500 lm	4000 K	black	MyLights Remote	2003.4663	2003.4664
143 W	16'500 lm	4000 K	black	dimnable digital	2001.8386	2001.8387
143 W	16'000 lm	3000 K	white	MyLights Remote	2003.4657	2003.4658
143 W	16'000 lm	3000 K	white	dimnable digital	2001.8380	2001.8381
143 W	16'000 lm	3000 K	black	MyLights Remote	2003.4659	2003.4660
143 W	16'000 lm	3000 K	black	dimnable digital	2001.8382	2001.8383

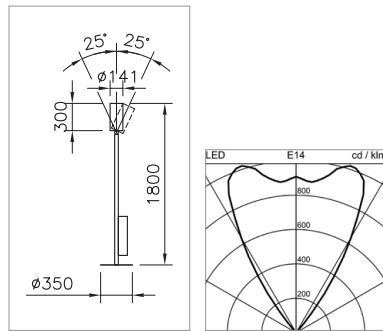

UPLIGHT STREAM

HIGH

System power	Luminous flux of luminaire	Colour temperature	Colour	Light control	Ref. n° Plug: CH	Ref. n° Plug: EU
46 W	6000 lm	2700 K	white	MyLights Remote	2003.7775	2003.7776
46 W	6000 lm	2700 K	white	dimmable digital	2003.7773	2003.7774
46 W	6000 lm	2700 K	black	MyLights Remote	2003.7761	2003.7790
46 W	6000 lm	2700 K	black	dimmable digital	2003.7760	2003.7789
80 W	7300 lm	2700–6500 K	white	MyLights Remote	2004.6780	2004.6781
80 W	7300 lm	2700–6500 K	black	MyLights Remote	2004.6774	2004.6788
120 W	14'500 lm	4000 K	white	MyLights Remote	2003.4669	2003.4670
120 W	14'500 lm	4000 K	white	dimmable digital	2001.8392	2001.8393
120 W	14'500 lm	4000 K	black	MyLights Remote	2003.4671	2003.4672
120 W	14'500 lm	4000 K	black	dimmable digital	2001.8394	2001.8395
120 W	14'000 lm	3000 K	white	MyLights Remote	2003.4665	2003.4666
120 W	14'000 lm	3000 K	white	dimmable digital	2001.8388	2001.8389
120 W	14'000 lm	3000 K	black	MyLights Remote	2003.4667	2003.4668
120 W	14'000 lm	3000 K	black	dimmable digital	2001.8390	2001.8391
143 W	16'500 lm	4000 K	white	MyLights Remote	2003.4678	2003.4679
143 W	16'500 lm	4000 K	white	dimmable digital	2001.8400	2001.8401
143 W	16'500 lm	4000 K	black	MyLights Remote	2003.4680	2003.4681
143 W	16'500 lm	4000 K	black	dimmable digital	2001.8402	2001.8403
143 W	16'000 lm	3000 K	white	MyLights Remote	2003.4673	2003.4674
143 W	16'000 lm	3000 K	white	dimmable digital	2001.8396	2001.8397
143 W	16'000 lm	3000 K	black	MyLights Remote	2003.4675	2003.4676
143 W	16'000 lm	3000 K	black	dimmable digital	2001.8398	2001.8399



OPERATING MODULE STREAM

for the workplace for switching, dimming, presence detection and daylight control


Notes	Ref. n°
	2005.1899



ACOUSTIC PANEL STREAM ROUND

Ø = 1500 mm

Notes	Ref. n°
white	2005.0943



ACOUSTIC PANEL STREAM RECTANGULAR

L = 1600 mm, B = 900 mm

Notes	Ref. n°
white	2005.0944



PLUG & PLAY FLEX-SENSOR

Compatible with MyLights Remote
Ø = 40 mm, L = 60 mm

Notes	Ref. n°
white	2004.9947
black	2004.9946