



1 HEAT SINK 2 LED CIRCUIT BOARD 4000 K, 3000 K, 2700 K 3 REFLECTOR 4 LENS 5 INNER RING FLUSH-MOUNTED, ROUND 6 INNER RING SET BACK, ROUND 7 INNER RING SET BACK, SQUARE

NOVO RANGE

	Ø 68+ □ 68+	Ø 80+ □ 96+	Ø 100+	Ø 125+	Ø 145+
MOUNTING RINGS					
ROUND					
Inner ring flush-mounted	● ○ ●	● ○ ●	—	—	—
Inner ring set back	● ○ ●	● ○ ●	● ○ ●	● ○	● ○
SQUARE					
Inner ring set back	● ○ ●	● ○ ●	—	—	—
TILTABLE					
by 15°	•	•	—	—	—
OPTICS					
Lens	•	•	—	—	—
Reflector	•	•	•	•	•
COLOUR TEMPERATURE					
2700 K	•	•	•	—	—
3000 K	•	•	•	•	•
4000 K	•	•	•	•	•
LUMINOUS FLUX					
	1000 lm	1000 lm	1500 lm	1800 lm	2300 lm
CONTROL					
ON/OFF	•	•	•	•	•
DALI	•	•	•	•	•

● black ○ white ● silver
• available — not available

For more information, please visit www.regent.ch/novo



NOVO
THE SYSTEM-BASED
DOWNLIGHT SERIES.



NOVO. IMPRESSIVELY CLEVER.

WITH NOVO YOU WILL QUICKLY AND EASILY FIND THE RIGHT DOWNLIGHT FOR YOUR CEILING CUT-OUT. THE CLEVER SYSTEM ENCOMPASSES A VARIETY OF DIFFERENT SIZES AND DESIGNS FOR A WIDE RANGE OF APPLICATIONS. GUARANTEES THE RIGHT SOLUTION FOR YOUR PROJECT.

NOVO. THE RANGE.

RECESSED DIRECTIONAL SPOTLIGHTS ROUND



Ø 68+	
For ceiling cut-outs of 68 to 80 mm	
Reflector or lens optics	
Inner ring flush-mounted, Recessed depth: 81 mm	Inner ring set back, Recessed depth: 99 mm
4000 K, 3000 K, 2700 K	
1000 lm	
tiltable by 15°	
● ○ ●	
ON/OFF, DALI	



Ø 80+	
For ceiling cut-outs of 80 to 91 mm	
Reflector or lens optics	
Inner ring flush-mounted, Recessed depth: 81 mm	Inner ring set back, Recessed depth: 99 mm
4000 K, 3000 K, 2700 K	
1000 lm	
tiltable by 15°	
● ○ ●	
ON/OFF, DALI	


RECESSED DOWNLIGHTS



Ø 100+	
For ceiling cut-outs of 100 to 113 mm	
Reflector	
Inner ring set back, Recessed depth: 104 mm	
4000 K, 3000 K, 2700 K	
1500 lm	
● ○ ●	
ON/OFF, DALI	



Ø 125+	
For ceiling cut-outs of 125 to 135 mm	
Reflector	
Inner ring set back, Recessed depth: 108 mm	
4000 K, 3000 K	
1800 lm	
● ○	
ON/OFF, DALI	

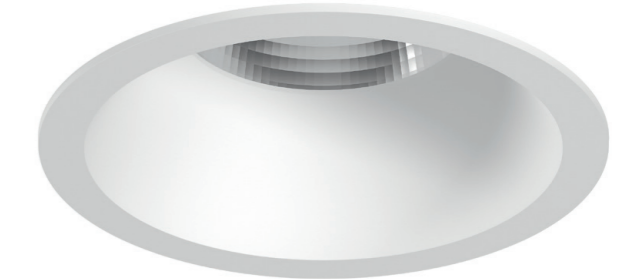

Ø 145+	
For ceiling cut-outs of 145 to 157 mm	
Reflector	
Inner ring set back, Recessed depth: 119 mm	
4000 K, 3000 K	
2300 lm	
● ○	
ON/OFF, DALI	

RECESSED DIRECTIONAL SPOTLIGHTS SQUARE



□ 68+	
For ceiling cut-outs of 68x68 to 73x73 mm	
Reflector or lens optics	
Inner ring set back, Recessed depth: 99 mm	
4000 K, 3000 K, 2700 K	
1000 lm	
tiltable by 15°	
● ○ ●	
ON/OFF, DALI	



□ 96+	
For ceiling cut-outs of 96x96 to 102x102 mm	
Reflector or lens optics	
Inner ring set back, Recessed depth: 99 mm	
4000 K, 3000 K, 2700 K	
1000 lm	
tiltable by 15°	
● ○ ●	
ON/OFF, DALI	



FEATURES

The wide trim facilitates recess mounting in ceiling cut-outs of different sizes (i.e. the same downlight can be applied for Ø 68 to 80 mm ceiling cut-outs)

High-quality workmanship, luminaire housing and trim made of die-cast aluminium, powder-coated

Simple to mount thanks to plug connection between control gear and luminaire

TECHNICAL DATA

Luminous flux of luminaire: 1000 lm, 1500 lm, 1800 lm, 2300 lm

Colour Rendering Index (CRI): Ra ≥ 90

Maintained luminous flux: L80 50'000 h

Control: ON/OFF oder DALI

Protection class II

Ingress Protection: IP20 / IP44

● black ○ white ● silver