


# Sorella™

by JLC • tech

*Introducing T-BAR LED's sister - Sorella!  
Modular lighting for integration  
with gypsum ceilings.*

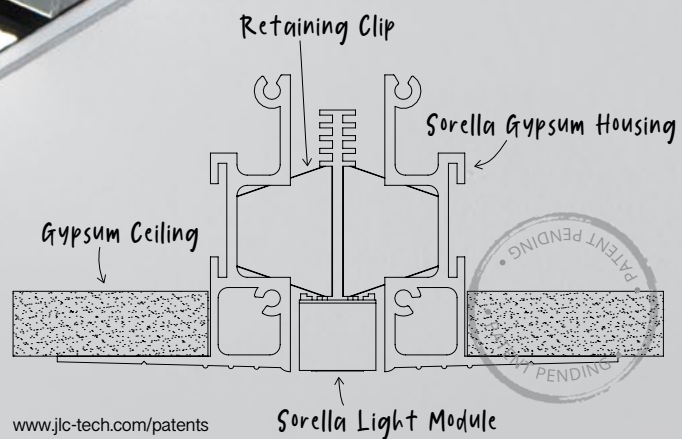

*Available with the  
entire suite of  
T-BAR LED® optics!*

JLC-Tech is proud to introduce T-BAR LED's sister, Sorella. A modular integrated lighting solution for gypsum ceilings, Sorella is available in various lengths with the entire suite of T-BAR LED® performance optics. Expand your JLC-Tech lighting design beyond grid ceiling systems!

*To learn more about Sorella™ visit [JLC-Tech.com](http://JLC-Tech.com).*

1. Specify Light Module

Product Name	LED/K Color	Length	Aperture	Optic	Color	Options
<b>SOR</b> = Sorella Light Module	<b>HW</b> = 3000K <b>MW</b> = 3500K <b>MN</b> = 4000K <b>HN</b> = 4500K <b>CN</b> = 5000K	1 = 1 ft 2 = 2 ft 3 = 3 ft 4 = 4 ft	15 = 9/16" 24 = 15/16"	<b>D</b> = Diffusing Lens <b>B</b> = Block Clear Diffusing Lens <b>B2</b> = Block Frosted Diffusing Lens <b>C2</b> = Multi-Reflector <b>C2WH</b> = White Multi-Reflector <b>C2BL</b> = Black Multi-Reflector <b>A2</b> = Asymmetric <b>S</b> = Acrylic Signage	<b>W</b> = White <b>C</b> = Custom	<b>IP</b> = IP65 <b>CP</b> = Chicago Plenum  Optional EM Battery/Driver Kit available (sold separately).

90 CRI available, consult factory.

Custom block heights 1/2"- 4" available, consult factory.


2. Specify Housing



Product Name	Length	Aperture	Mounting	Options
<b>SORH</b> = Sorella Housing	1 = 1 ft 2 = 2 ft 3 = 3 ft 4 = 4 ft	15 = 9/16" 24 = 15/16"	<b>MF</b> = Mud Flange	<b>CP</b> = Chicago Plenum

[www.jlc-tech.com/patents](http://www.jlc-tech.com/patents)

Example ordering code: **SOR-MW-1-15-B-W + SORH-1-15-MF**

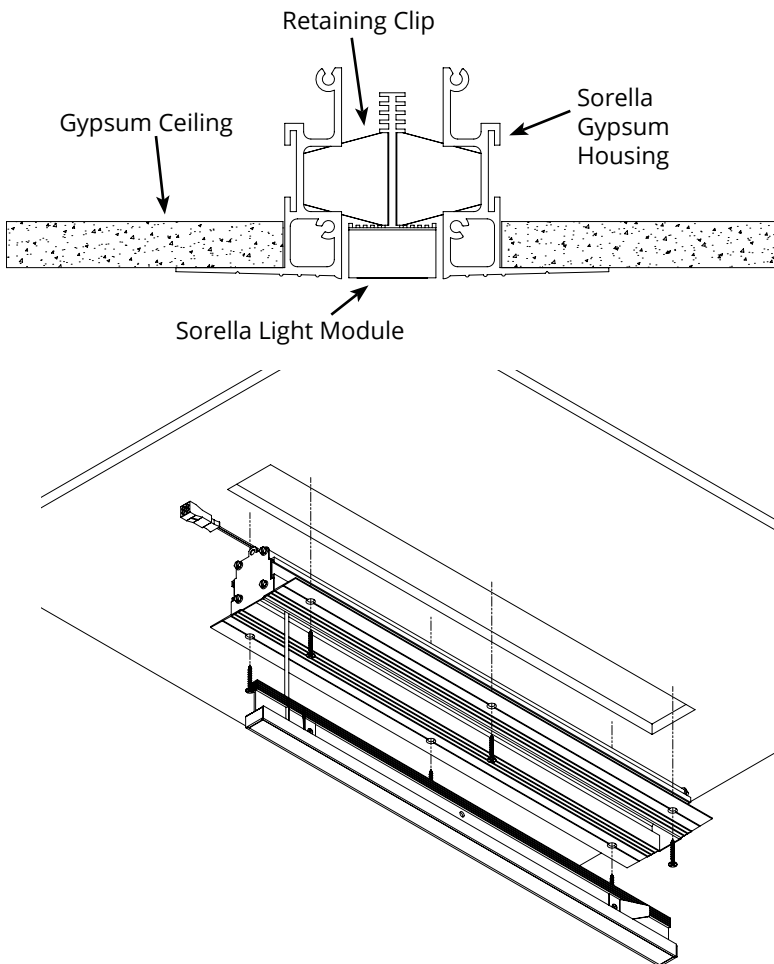

**NOTES:**

Sorella modules can be parallel connected up to 12 linear feet max per power supply. Remote power supply includes JB compartment for AC input direct wiring with metal conduit, must be installed in an accessible location. Max distance from power supply to fixtures is 30 feet with 18 AWG wire. Longer distance achievable if using higher gauge wire.

\*Power supply ordered separately (refer to website).

**APPLICATIONS:**

Executive, Medical, Health, Educational, Retail, Hotels, Airport, Hospitality and any open space areas that require a unique and elegant architectural lighting design.

**MOUNTING:**

Mud flange mounting kit for trimless installation into gypsum ceiling applications. Appropriate backer or fasteners required.

**MATERIALS:**

Anodized and painted aluminum extruded body, stainless steel mounting clips, white PC end caps, PMMA lens or PC reflectors.

**ELECTRICAL/OPTICAL:**

Fixtures consume 8W total (1 foot), 16W total (2 foot), 24W total (3 foot), or 32W total (4 foot). Power supply consumption not included. Input voltage 24VDC. Plenum rated input cable provided with quick connector to allow multiple modules to be easily connected together (max 12 linear feet of product). Use solid copper wire or wire ferrules to fit into quick connectors. For EM Battery/Driver Kit, order separately.

**WARRANTY:**

5 years

**LISTINGS:**

ETL/cETLus CE RoHS. Indoor use only. IC Rated.

\* Visit [www.jlc-tech.com](http://www.jlc-tech.com) to view the complete Sorella order specification guide.

JLC-Tech LLC | Pembroke, MA - USA | [info@jlc-tech.com](mailto:info@jlc-tech.com) | [www.jlc-tech.com](http://www.jlc-tech.com)

©2022 JLC-Tech LLC, All Rights Reserved. JLC-Tech LLC reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance. Please always refer to our web site for latest technical product information.

